




169.00 EUR

incl. 19% VAT, plus [shipping](#)

- Fully motorized !
- Radio
- Amplifier
- DVD Drive !

CARTFT.COM

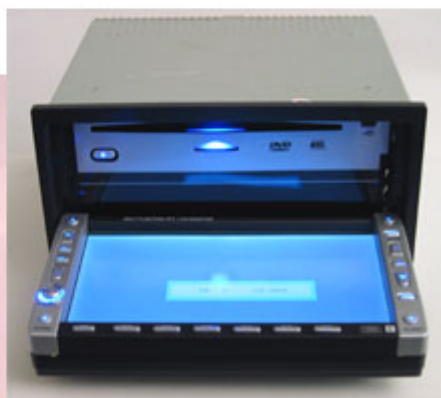

**Support:** [Manual \[EN\]](#) | [Connexion diagram \[DE\]](#) | [Connexion diagram \[EN\]](#)

Remnant offer. Refurbished. Slight traces of usage on device. 2 years warranty.

The CID650 Display for the Doppel-DIN-slot has some exiting features :

- Built-In Slot-In DVD drive, which gets connected with your carpc via USB.
- Power- and Reset-button in the front, which can be connected with your carpc.
- The display can be adjusted in height motorized.
- Rear camera sensor cable for automatic switching to rear camera. - Integrated 4x25W amplifier with AM/FM Radio

The CID-650 can be connected to every PC with VGA- and USB connectors.

Drivers-CD included, compatible with :

- Windows 95/98/ME/NT4/2000/XP/7/8/8.1/10
- XP Tablet PC Edition
- Windows CE 2.12, 3.0, .net
- Linux RedHat,Mandrake,..
- Macintosh OS 9.x, 10.x
- DOS,..

### Spezifications

|                       |                          |
|-----------------------|--------------------------|
| Display size          | 6.5" digital             |
| Aspect ratio          | 16:9 wide TFT screen     |
| Dot Resolution        | 2400x480= 1,152,000 dots |
| Physical Resolution   | 800x480                  |
| Supported Resolutions | 640x480-1024x768         |
| Color configuration   | RGB stripe               |
| Power input           | DC 11-24V                |
| Power consumption     | max. 15W                 |

---

|                        |                                                                                                                                                                                                                                                                                                                                 |
|------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <i>Video system</i>    | 2x Video inputs (PAL/NTSC)<br>1x VGA input                                                                                                                                                                                                                                                                                      |
| <i>Audio system</i>    | - 4x25W Amplifier<br>- AM/FM Radio - 2x AUX input (2x2 Cinch)                                                                                                                                                                                                                                                                   |
|                        | Display Case : 190x176x99 mm<br>Display : 144 x 77 mm<br>Video input signal: 1.0Vp-p, composite video<br>Full function OSD control (englisch)                                                                                                                                                                                   |
| <i>Scope of Supply</i> | - 6.5" VGA Doppel-DIN Display<br>- IR Remote<br>- ISO-speaker connector cable<br>- ISO-connector cable(Plus,Ignition plus, GND + Rearcam-sensor, PC-Reset, PC-Power)<br>- VGA-cable<br>- USB-cable (for Touchscreen and DVD-drive combined)<br>- 2x Cinch-cables<br>- Touchscreen Driver-CD<br>- Touchscreen pencil<br>- Manual |

Manual online : [here](#)

**Notes:**

- "Brightnss"-Button is without function (by design)