


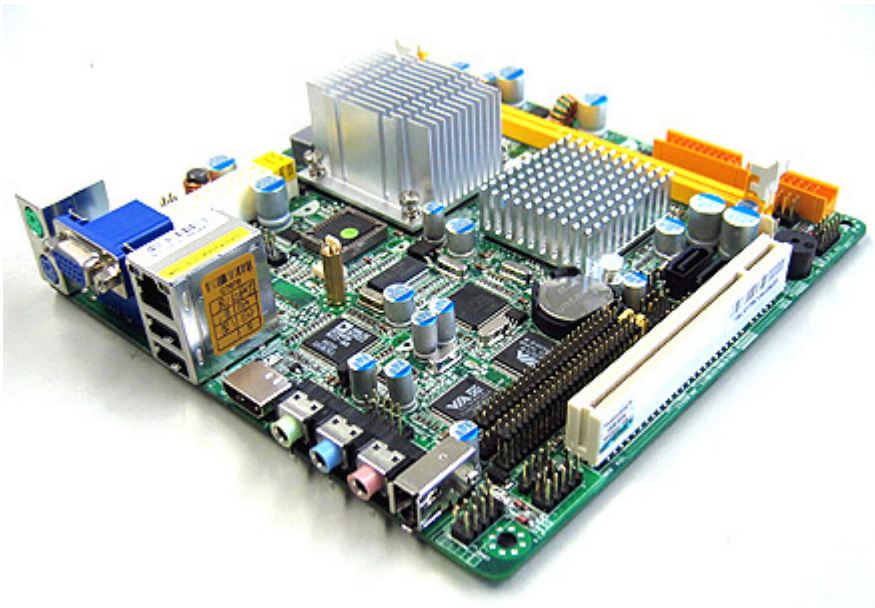

999.00 EUR  
incl. 19% VAT, plus [shipping](#)

- HDMI !
- HDTV !

- VIA CX700M Single chipset Technology
- Support Front Side Bus 533MHz
- Support 2 Serial ATA 2 Devices with RAID 0, 1
- Support PCI 120-Pin Adapter Conn. With Expansion Daughter-boards
- Gigabit Ethernet LAN Supported
- 6 Channel HD Audio CODEC
- VIA VT6307 IEEE1394a Controller
- VIA VT1622A TV Encoder
- 17 x 17CM Mini-ITX Form Factor

|                             |                                                                                                                                                                                                                                                                                                    |
|-----------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Form Factor</b>          | Mini-ITX Express Motherboard                                                                                                                                                                                                                                                                       |
| <b>CPU</b>                  | VIA C7 1.2 GHZ CPU                                                                                                                                                                                                                                                                                 |
| <b>Memory</b>               | 1 * 240-pin DIMM Sockets for DDR2 533 up to 1 GB                                                                                                                                                                                                                                                   |
| <b>Chipset</b>              | VIA CX700M Single Chipset                                                                                                                                                                                                                                                                          |
| <b>Power Management</b>     | ACPI S3 Compliant ,supports power saving mode                                                                                                                                                                                                                                                      |
| <b>PCI enhanced IDE</b>     | 2* Ultra DMA 133 / 100 / 66 IDE Devices Support                                                                                                                                                                                                                                                    |
| <b>Serial ATA Interface</b> | 2 Serial ATA2 HDDs with RAID 0, 1 Function Support                                                                                                                                                                                                                                                 |
| <b>VGA Interface</b>        | VIA Unichrome Pro II                                                                                                                                                                                                                                                                               |
| <b>Video Memory</b>         | Share Memory up to 128MB                                                                                                                                                                                                                                                                           |
| <b>Audio Interface</b>      | VIA VT1708A 6-Channel HD Audio CODEC                                                                                                                                                                                                                                                               |
| <b>LAN Interface</b>        | VIA VT6122 10 / 100 / 1000 PCI LAN                                                                                                                                                                                                                                                                 |
| <b>Extended Interface</b>   | 1 * 32-bit PCI Slot                                                                                                                                                                                                                                                                                |
|                             | 1 * PCI 120-Pin Adapter Connector<br>with Expansion Daughter Boards                                                                                                                                                                                                                                |
| <b>Internal I/O Port</b>    | 2 * High Speed USB Connectors for 4 USB 2.0 Ports<br>1 * CPU Smart Fan Connector, 2 * Chassis Fan Connectors<br>2 * 9-Pin COM Port Connector<br>1 * CD / AUX Audio in & SPEAK Out<br>1 * HDTV Out Connector<br>1 * IrDA (SIR)<br>1 * 6-pin Video Input Pin-header<br>1 * PCI 120-Pin Adapter Conn. |

|                          |                                                                                                                                                                                                               |
|--------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>External I/O Port</b> | 2 * High Speed USB Connectors @ 480 M-bit / s<br>1 * D-Sub 15-pin VGA Connector<br>1 * HDMI Port<br>1 * PS / 2 Mouse & 1 * PS/2 Keyboard<br>1 * RJ45 Connector<br>1 * Audio I / O<br>1 * IEEE 1394a Connector |
| <b>BIOS</b>              | Award 4 MB Flash ROM                                                                                                                                                                                          |
| <b>Power Requirement</b> | Standard 24-Pin ATX Power supply                                                                                                                                                                              |
| <b>Dimension</b>         | 170mm x 170mm                                                                                                                                                                                                 |